



IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant: Leblans, et al. ) Attorney reference: 27500-157  
Serial No.: 10/607,822 ) Art Unit: 2879  
Filing Date: 6/27/2003 )  
Title: A BINDERLESS STORAGE PHOSPHOR )  
SCREEN COMPRISING A SUPPORT )  
INCLUDING AN AMORPHOUS (a-C) )  
CARBON LAYER )

TRANSMITTAL OF PRIORITY DOCUMENTS

Commissioner For Patents  
P.O. Box 1450  
Alexandria, VA 22313-1450

Dear Sir,

Enclosed please find a certified copy of European Patent Office Applications:

EPO 02100764.6

Please mark the file to indicate receipt of the priority document.

October 24, 2003

Respectfully submitted,

Joseph T. Guy  
Registration No. 35,172  
Agent for Applicants  
NEXSEN PRUET JACOBS & POLLARD, LLC  
P.O. Box 10107  
Greenville, SC 29603  
Telephone: 864-370-2211  
Facsimile: 864-282-1177

I hereby certify that this correspondence  
is being deposited with the United States  
Postal Service as first class mail in an envelope  
addressed to: Director of the United States  
Patent & Trademark Office, P.O. Box 1450  
Alexandria, VA 22313-1450 on 10-27-03

10-27-03  
Date

1. 2.

3.



**Europäisches  
Patentamt**

**European  
Patent Office**

**Office européen  
des brevets**

**Bescheinigung**

**Certificate**

**Attestation**

Die angehefteten Unterla-  
gen stimmen mit der  
ursprünglich eingereichten  
Fassung der auf dem näch-  
sten Blatt bezeichneten  
europäischen Patentanmel-  
dung überein.

The attached documents  
are exact copies of the  
European patent application  
described on the following  
page, as originally filed.

Les documents fixés à  
cette attestation sont  
conformes à la version  
initialement déposée de  
la demande de brevet  
européen spécifiée à la  
page suivante.

**Patentanmeldung Nr.    Patent application No.    Demande de brevet n°**

02100764.6

Der Präsident des Europäischen Patentamts;  
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets  
p.o.

**R C van Dijk**





Anmeldung Nr:  
Application no.: 02100764.6  
Demande no:

Anmeldetag:  
Date of filing: 28.06.02  
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

AGFA-GEVAERT  
Septestraat 27  
2640 Mortsel  
BELGIQUE

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:  
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.  
If no title is shown please refer to the description.  
Si aucun titre n'est indiqué se referer à la description.)

A binderless storage phosphor screen comprising a support including an amorphous  
(a-C) carbon layer

In Anspruch genommene Priorität(en) / Priority(ies) claimed /Priorité(s)  
revendiquée(s)  
Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/  
Classification internationale des brevets:

G21K/

Am Anmeldetag benannte Vertragstaaten/Contracting states designated at date of  
filing/Etats contractants désignées lors du dépôt:

AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU MC NL PT SE TR



**[ABSTRACT]**

## TITLE

A BINDERLESS STORAGE PHOSPHOR SCREEN COMPRISING A SUPPORT  
5 INCLUDING AN AMORPHOUS (a-C) CARBON LAYER

A binderless storage phosphor screen comprising a vacuum  
deposited phosphor layer on a support, wherein the support includes  
a layer of amorphous carbon and optionally one or more auxilliary  
10 layers.





2 -

**[DESCRIPTION]**

## FIELD OF THE INVENTION

5

This invention relates to a binderless phosphor screen with a support including an amorphous carbon (a-C) layer.

## 10 BACKGROUND OF THE INVENTION

A well-known use of phosphors is in the production of X-ray images. In a conventional radiographic system an X-ray radiograph is obtained by X-rays transmitted image-wise through an object and  
15 converted into light of corresponding intensity in a so-called intensifying screen (X-ray conversion screen) wherein phosphor particles absorb the transmitted X-rays and convert them into visible light and/or ultraviolet radiation to which a photographic film is more sensitive than to the direct impact of X-rays.

20 According to another method of recording and reproducing an X-ray pattern disclosed e.g., in US-A-3 859 527 a special type of phosphor is used, known as a photostimulable phosphor, which being incorporated in a panel or screen, is exposed to incident pattern-wise modulated X-ray beam and, as a result thereof, temporarily  
25 stores energy contained in the X-ray radiation pattern. At some interval after the exposure, a beam of visible or infra-red light scans the panel or screen to stimulate the release of stored energy as light that is detected and converted to sequential electrical signals which can be processed to produce a visible image. For this  
30 purpose, the phosphor should store as much as possible of the incident X-ray energy and emit as little as possible of the stored energy until stimulated by the scanning beam. This is called "digital radiography" or "Computed Radiography" (CR).

In both kinds of radiography the amount of exposure given for  
35 an examination is often tuned by a "phototimer". A "phototimer" comprises a radiometer for measuring the radiation dose passing through the object (patient) and the radiographic imaging system and

3 - ' .

a connection to the source of penetrating radiation for switching the penetrating radiation source off as soon as a pre-set dose is reached. In systems using such a phototimer it is important that a well measurable dose reaches the radiometer in the phototimer, since  
5 when the dose reaching the phototimer is too low, the reproducibility of the off-switching of the source of penetrating radiation is not what it should be from the point of view of image quality. Thus, the imaging system should itself only absorb penetrating radiation up to such an extent as is necessary for good  
10 speed and image quality so that - with a patient dose as low as possible and only dictated by the examination at hand - the radiometer is reached by a sufficiently high exposure dose for reproducible off-switching of the source of penetrating radiation.

In a practical setting the amount of radiation that reaches the  
15 "phototimer" is determined by the absorption of penetrating radiation by the object, the tube side of the cassette containing the storage phosphor panel or screen and the back side of the cassette. The absorption of the storage phosphor panel or screen is determined by the phosphor that is used, the amount of phosphor and  
20 the support. Higher absorption in the phosphor layer is advantageous for speed and image quality of the radiographic imaging system so there is a need to increase the thickness (the absorption) of the phosphor layer, this can only be done when the total absorption of phosphor layer and support remains almost constant.  
25 Thus increasing the thickness of the phosphor layer must be compensated by lowering the absorption of penetrating radiation in the support. Especially in radiographic techniques where penetrating radiation of low energy is used (e.g. mammography, certain non-destructive testing applications, etc.) the contribution  
30 of the support to the absorption of the phosphor screen or panel or screen can not be neglected.

The lowering of the absorption of penetrating radiation by the support can be done by lowering the thickness of the support, by using a support with low absorption, etc.. On the other hand the  
35 support of the storage phosphor panel or screen should have high mechanical strength, low brittleness and, in case of vacuum deposition of the phosphor on it, be able to withstand the

temperatures encountered during vapour deposition. Thus the need for a support giving a good compromise between often contradictory properties, as those cited above, remains present.

5

#### OBJECTS AND SUMMARY OF THE INVENTION

It is an object of the invention to provide a storage phosphor panel or screen including a support with low absorption of penetrating radiation that has high mechanical strength and that can be used when applying vapour deposition of a phosphor.

It is a further object of the invention to provide a storage phosphor panel or screen including a support with low absorption of X-ray radiation with an energy lower than 70 keV that has high mechanical strength and that can be used when applying vapour deposition of a phosphor, the panel or screen being well suited for use in mammography.

The object of the invention is realised by providing a storage phosphor panel or screen as claimed in claim 1. Specific features for preferred embodiments of the invention are disclosed in the dependent claims.

Further advantages and embodiments of the present invention will become apparent from the following description.

25

#### BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 shows schematically an embodiment of a storage phosphor panel or screen of this invention.

30

Figure 2 shows schematically a further embodiment of a storage phosphor panel or screen of this invention.

Figure 3 shows schematically an other embodiment of a storage phosphor panel or screen of this invention.

35

5 - ' . . .

## DETAILED DESCRIPTION OF THE INVENTION

In the production of binderless phosphor screens by means of chemical vapour deposition in vacuum, the support on which the phosphor is deposited can be heated up to a temperature of about 400°C. So use of a thermostable support is necessary. Therefore, though being a support containing only elements with low atomic number, a polymeric support is not the most suitable. It was now found that including an amorphous carbon film in the support did open perspectives in order to produce a binderless storage phosphor screen on a support with low X-ray absorption, even if the storage phosphor layer is applied by vacuum deposition at fairly high temperatures. Amorphous carbon films suitable for use in this invention are commercially available through, e.g., Tokay Carbon Co, LTD of Tokyo, Japan or Nisshinbo Industries, Inc of Tokyo, Japan, where they are termed "Glass-Like Carbon Film", or "Glassy Carbon".

In a binderless phosphor panel or screen according to the present invention, the thickness of the amorphous carbon layer can range from 100 µm up to 3000 µm, a thickness between 500 µm and 2000 µm being preferred as compromise between flexibility, strength and X-ray absorption.

A first embodiment of the invention

In a binderless storage phosphor screen of the present invention the storage phosphor layer can be directly positioned adjacent to the amorphous carbon layer, e.g., by vacuum depositing the storage phosphor on the amorphous carbon film, and the screen can be used without adding further layers to the screen, this is a very simple embodiment of a storage phosphor screen of the present invention. This embodiment is shown in figure 1 wherein a storage phosphor layer (1) on a support (2) is adjacent to an amorphous carbon layer (23).

6 -

## A second embodiment of the invention

In a further embodiment of the storage phosphor screen or panel according to the present invention an auxiliary layer can be added to the screen at the side of the amorphous carbon layer facing away from the phosphor layer. Such a screen is shown in figure 2, wherein a phosphor layer (1) on a support (2) is schematically shown wherein the support includes an amorphous carbon layer (23) and an auxiliary layer (24). This auxiliary layer is preferably a polymeric layer that is laminated to the amorphous carbon layer. By doing so the mechanical strength, especially with respect to brittleness and flexibility, of the panel or screen of the present invention is enhanced. The need for very high mechanical strength is especially present in the radiographic systems making use of a storage phosphor panel wherein during reading of the energy stored in the panel, the panel is automatically removed from the cassette, moved through a reader, often via a sinuous path, and then put back in the cassette. In such a reader it is quite advantageous to make use of a screen or panel of the present invention with an auxiliary layer laminated on the amorphous carbon layer. This auxiliary layer can be any polymeric film known in the art, e.g. polyester film, polyvinylchloride, polycarbonate, syntactic polystyrene, etc.. Preferred polymeric films are polyester ester films, as e.g., polyethylene terephthalate films, polyethylene naphthalate films, etc.. The thickness of the auxiliary layer (24) can range from 1  $\mu\text{m}$  to 500  $\mu\text{m}$ . It is possible to use a fairly thin amorphous carbon film, e.g., 400  $\mu\text{m}$  and laminate a 500  $\mu\text{m}$  thick auxiliary film to it as well as to use a thick amorphous carbon film, e.g., 2000  $\mu\text{m}$  thick with a thin, e.g., 6  $\mu\text{m}$  thick, polymeric film laminated onto it. The relative thickness of the amorphous carbon and polymeric film can be varied widely and is only directed by the required physical strength of the amorphous carbon during deposition of the phosphor layer and the required flexibility during use of the panel.

7 - ' . .

## A third embodiment of the invention

It has been shown, e.g. in the European Patent Application concurrently filed herewith, that adding a specularly reflecting layer between the phosphor layer and the amorphous carbon layer can enhance both image quality and speed of the screen or panel. Also in a panel according to the present invention, the addition of such a specularly reflecting auxiliary layer may be beneficial. When such a layer is added, it preferably reflects at least 80 % of the light impinging on it in a specular way. More preferably said layer reflects 90 % of the impinging light specularly. Such layers are preferably very thin (thickness under 20  $\mu\text{m}$ , preferably under 10  $\mu\text{m}$ ) metal layers. When in a screen or panel according to the present invention, a specularly reflecting layer is present, it is preferred that the layer is a thin aluminum layer (thickness preferably lower than or equal to 10  $\mu\text{m}$ , more preferably lower than or equal to 5  $\mu\text{m}$ ). Since such a thin metal layer can be quite corrosion sensitive it is preferred that, when a specularly reflecting metal layer is present in a panel or screen of the present invention, that this layer is covered with a barrier layer (a further auxiliary layer) that impedes water and/or moisture of reaching the reflecting auxiliary layer. Such a barrier layer can be any moisture barrier layer known in the art, but is preferably a layer of parylene. Most preferred polymers for use in the barrier layer of the present invention are vacuum deposited, preferably chemical vacuum deposited poly-p-xylylene film. A poly-p-xylylene has repeating units in the range from 10 to 10000, wherein each repeating unit has an aromatic nuclear group, whether or not substituted. As a basic agent the commercially available di-p-xylylene composition sold by the Union Carbide Co. under the trademark "PARYLENE" is thus preferred. The preferred compositions for the barrier layer are the unsubstituted "PARYLENE N", the monochlorine substituted "PARYLENE C", the dichlorine substituted "PARYLENE D" and the "PARYLENE HT" (a completely fluorine substituted version of PARYLENE N, opposite to the other "parylenes" resistant to heat up to a temperature of 400°C and also resistant to ultra-violet radiation, moisture resistance being about the same as the moisture resistance of "PARYLENE C").

Most preferred polymers for use in the preparation of the barrier layer in a panel of this invention are poly(p-2-chloroxylylene), i.e. PARYLENE C film, poly(p-2,6-dichloroxylylene), i.e. PARYLENE D film and "PARYLENE HT" (a completely fluorine substituted version of PARYLENE N. The advantage of parylene layers as moisture barrier layers in a panel or screen of the present invention layer is the temperature resistance of the layers, the temperature resistance of the parylene layers is such that they can withstand the temperature need for vacuum depositing the storage phosphor. The use of parylene layers in storage phosphor screens has been disclosed in, e.g., EP-Applications Nos. 02100297, 02100298 and 02100299, all of them having been filed March 26, 2002.

Thus a screen or a panel according to this third embodiment of the invention as set forth hereinbefore has (Figure 3) a phosphor layer (1) and a support (2) wherein the support includes an amorphous carbon layer (23) and between the phosphor and the amorphous carbon layer a specularly reflecting layer (22) adjacent to the amorphous carbon layer and a parylene layer (21) on top of the reflecting layer. A polymeric layer (24) is laminated to the amorphous carbon layer. In a preferred embodiment according to the present invention said reflective auxiliary layer (22) is an aluminum layer with a thickness between 0.2  $\mu\text{m}$  and 200  $\mu\text{m}$ .

The invention moreover includes a method for producing a storage phosphor panel comprising the steps of :

- providing an amorphous carbon film,
- vacuum depositing a storage phosphor layer on said amorphous carbon film and
- optionally laminating a polymeric film on the side of the amorphous carbon film not covered by said phosphor.

The invention further includes a method for producing a storage phosphor panel comprising the steps of :

- providing an amorphous carbon film
- applying a specularly reflecting layer on said amorphous carbon film,
- vacuum depositing a storage phosphor layer on said amorphous

9 - ' , .

carbon film and

- optionally laminating a polymeric film on the side of the amorphous carbon film not covered by said phosphor.

5 The invention further includes a method for producing a storage phosphor panel comprising the steps of :

- providing an amorphous carbon film  
- applying a specularly reflecting layer on said amorphous carbon film

10 - chemical vacuum depositing a parylene layer on top of said specularly reflecting layer,

- vacuum depositing a storage phosphor layer on said amorphous carbon film and, optionally,

- laminating a polymeric film on the side of the amorphous carbon film not covered by said phosphor.

The screen or panel of this invention can include on top of the phosphor layer any protective layer known in the art. Especially suitable for use are those protective layers disclosed in EP-  
20 Applications Nos. 02100297, filed March 26, 2002; and 01000694 and 01000695, both filed December 3, 2001.

The screen or the panel of the present invention can also have reinforced edges as described in, e.g., US-A-5 334 842 and  
25 US-A-5 340 661.

The surface of the phosphor layer (1) in a panel or screen of the present invention can be made smaller than the surface of the support (2) so that the phosphor layer does not reach the edges of  
30 the support. Such a screen has been disclosed in, e.g., EP-Application No. 02100297, filed March 26, 2002.

The storage phosphor used in a panel or screen of the present invention is preferably an alkali metal storage phosphor. Such a  
35 phosphor is disclosed in US-A-5 736 069 and corresponds to the formula :  $M^{1+X}.aM^{2+X'}_2bM^{3+X''}_3:cZ$



10 -

wherein:  $M^{1+}$  is at least one member selected from the group consisting of Li, Na, K, Cs and Rb,

$M^{2+}$  is at least one member selected from the group consisting of Be, Mg, Ca, Sr, Ba, Zn, Cd, Cu, Pb and Ni,

5  $M^{3+}$  is at least one member selected from the group consisting of Sc, Y, La, Ce, Pr, Nd, Pm, Sm, Eu, Gd, Tb, Dy, Ho, Er, Tm, Yb, Lu, Al, Bi, In and Ga,

Z is at least one member selected from the group  $Ga^{1+}$ ,  $Ge^{2+}$ ,  $Sn^{2+}$ ,  $Sb^{3+}$  and  $As^{3+}$ ,

10 X, X' and X'' can be the same or different and each represents a halogen atom selected from the group consisting of F, Br, Cl, I and  $0 \leq a \leq 1$ ,  $0 \leq b \leq 1$  and  $0 < c \leq 0.2$ .

An especially preferred phosphor for use in a panel or screen  
15 of the present invention is a CsX:Eu stimuable phosphor, wherein X represents a halide selected from the group consisting of Br and Cl, produced by a method comprising the steps of :

- mixing said CsX with between  $10^{-3}$  and 5 mol % of a Europium compound selected from the group consisting of  $EuOX'$ ,  $EuX'_2$  and  
20  $EuX'_3$ , X' being a member selected from the group consisting of F, Cl, Br and I;
- firing said mixture at a temperature above 450 °C;
- cooling said mixture and
- recovering the CsX:Eu phosphor.

25

Such a phosphor has been disclosed in EP-A-1 203 394.

The phosphor is preferably vacuum deposited on the support under conditions disclosed in EP-A-1 113 458 and EP-A-1 118 540.

30 In a preferred embodiment the panel or screen according to the present invention is a binderless phosphor panel or screen, wherein said phosphor layer comprises a needle-shaped CsX:Eu phosphor, wherein X represents a halide selected from the group consisting of Br and Cl.

11 - ' , ' ,

The present invention moreover includes a method for exposing an object to X-rays comprising the steps of :

- providing an X-ray machine including an X-ray tube equipped for emitting X-rays with an energy lower than or equal to 70 keV and a phototimer coupled to said X-ray tube for switching said tube on and off in accordance with an X-ray dose reaching said phototimer,
- placing an object between said X-ray tube and said phototimer
- placing a binderless storage phosphor panel or screen according to this invention between said object and said phototimer and
- 10 - activating said X-ray tube for exposing said object, said cassette and said phototimer until said phototimer switches said X-ray tube off.

The present invention further includes a method according as  
15 described just hereinbefore, wherein said X-ray tube is equipped for emitting X-rays with an energy lower than or equal to 40 keV.

A screen or panel of this invention is thus very well suited for use in mammography where X-ray machines with low keV are used,  
20 and in certain non-destructive testing applications.

#### Parts list

1. phosphor layer
- 25 2. support
- 21 auxiliary layer, moisture barrier layer
- 22 auxiliary layer, specularly reflecting layer
- 23 amorphous carbon layer
- 24 auxiliary layer, polymeric layer

30

#### Examples

While the present invention will hereinafter be described in  
35 connection with preferred embodiments thereof, it will be understood that it is not intended to limit the invention to those embodiments.

12 -

An X-ray cassette with a phosphor screen or panel was exposed with X-rays having an energy of 28 keV from a Mo-anode (30  $\mu\text{m}$  Mo, intern filtering and without filtering, respectively).

5        A Mammory Detail R<sup>®</sup> screen, trade marketed product from Agfa-Gevaert, Morstel, Belgium, was taken as a comparative screen: as that system just admits use of a "phototimer" (with respect to absorption of X-ray exposure energy as explained in the detailed description hereinbefore). Absorption for all examined cassettes  
10 with screens or panels should thus not exceed the absorption, measured for the comparative screen, set forth hereinbefore.

Starting from a 10 mR X-ray dose reaching the cassette, X-rays  
15 passing through 4 cm of a polymethyl methacrylate polymeric layer, further consecutively passing the cassette bottom (3 mm of polyethylene), the panel or screen (varying composition in the experiments as will be explained hereinafter) and the cassette cover (4.1 mm of polyethylene), it has been measured that a dose in the  
20 range from 0.75 up to 0.85 mR is required in order to get an acceptable and precise working of the "phototimer", in order to avoid too much exposure to X-rays for the patient.

In the panels or screens, CsBr:Eu phosphor layers (of varying  
25 thicknesses, expressed in  $\mu\text{m}$  and indicated in the Table 1) were coated on varying supports (aluminum, a-C "amorphous carbon", glass and iron), having varying thicknesses (expressed in  $\mu\text{m}$  in the Table 1) and X-ray energies (doses in mR) reaching the "phototimer" have been summarised in the Table 1 for each examined panel or screen.  
30 As a thickness of the support layer, the thickness still offering enough dose at the position of the phototimer after the X-rays have passed the cassette, for differing thicknesses of the CsBr:Eu phosphor layer, have been given in the Table 1 hereinafter.

Table 1

Support material and its thickness ( $\mu\text{m}$ )	CsBr:Eu phosphor layer thickness ( $\mu\text{m}$ )	Dose detected at the phototimer (mR)
Al 100 $\mu\text{m}$	150 $\mu\text{m}$	0.75
Al 400 $\mu\text{m}$	125 $\mu\text{m}$	0.78
Al 800 $\mu\text{m}$	100 $\mu\text{m}$	0.76
a-C 2000 $\mu\text{m}$	150 $\mu\text{m}$	0.73
a-C 2000 $\mu\text{m}$	125 $\mu\text{m}$	0.81
a-C 2000 $\mu\text{m}$	100 $\mu\text{m}$	0.91
Glass 2000 $\mu\text{m}$	140 $\mu\text{m}$	0.95
Glass 2000 $\mu\text{m}$	150 $\mu\text{m}$	0.85
Glass 2000 $\mu\text{m}$	160 $\mu\text{m}$	0.76
Fe 100 $\mu\text{m}$	60 $\mu\text{m}$	0.55
Fe 100 $\mu\text{m}$	80 $\mu\text{m}$	0.44
Fe 100 $\mu\text{m}$	100 $\mu\text{m}$	0.36

5 From the results obtained in the Table 1, it is clear that the amorphous carbon (a-C) support is superior as little absorption occurs, if compared e.g. with Fe (not suitable for use, even not for a layer thickness of only 100  $\mu\text{m}$ ) and with aluminum (suitable for use up to 800  $\mu\text{m}$  for a thinner phosphor layer of 100  $\mu\text{m}$ ): amorphous  
10 carbon provides enough dose at the position of the phototimer, even for the thickest phosphor layer (150  $\mu\text{m}$ ) and a thickness of 2000  $\mu\text{m}$  is perfectly suitable for use! Amorphous carbon is comparable with glass as illustrated in Table 1, but it is superior with respect to glass as it is much more suitable to be applied in the manufacturing  
15 of phosphor panels or screens of the present invention.

Having described in detail preferred embodiments of the current invention, it will now be apparent to those skilled in the art that numerous modifications can be made therein without departing from  
20 the scope of the invention as defined in the appending claims.

**[CLAIMS]**

1. A binderless storage phosphor panel or screen comprising a vacuum deposited phosphor layer (1) on a support (2), characterised in that said support includes a layer of amorphous carbon (23).
- 5 2. A binderless phosphor panel or screen according to claim 1, wherein said support further includes a polymeric auxiliary layer (24) farther away from said phosphor layer than said layer of amorphous carbon.
3. A binderless phosphor panel or screen according to claim 1 or 2,  
10 wherein said support further includes a reflective auxiliary layer (22).
4. A binderless phosphor panel or screen according to claim 3, wherein said reflective auxiliary layer (22) is an aluminum layer with a thickness between 0.2  $\mu\text{m}$  and 200  $\mu\text{m}$ .
- 15 5. A binderless phosphor panel or screen according to claim 3 or 4, wherein said support further includes a protective auxiliary layer (21) between said reflective auxiliary layer and said phosphor layer.
6. A binderless phosphor panel or screen according to claim 5,  
20 wherein said protective auxiliary layer is a layer of parylene wherein said parylene is selected from the group consisting of parylene C, parylene D and parylene HT.
7. A binderless phosphor panel or screen according to any of the preceding claims wherein said phosphor layer comprises a needle  
25 shaped CsX:Eu phosphor, wherein X represents a halide selected from the group consisting of Br and Cl.
8. A method for producing a binderless storage phosphor panel comprising the steps of :
  - providing an amorphous carbon film,

15 - ' / ' ,

- vacuum depositing a storage phosphor layer on said amorphous carbon film and, optionally,

- laminating a polymeric film on the side of the amorphous carbon film not covered by said phosphor.

5 9. A method according to claim 8, wherein before said step of vacuum depositing a storage phosphor layer on said amorphous carbon film a step of applying a specularly reflecting layer on said amorphous carbon film is included.

10 10. A method for exposing an object to X-rays comprising the steps of :  
- providing an X-ray machine including an X-ray tube equipped for emitting X-rays with an energy lower than or equal to 70 keV and a phototimer coupled to said X-ray tube for switching said tube on and off in accordance with an X-ray dose reaching said  
15 phototimer,  
- placing an object between said X-ray tube and said phototimer  
- placing a binderless storage phosphor panel or screen according to any one of the preceding claims between said object and said phototimer and  
20 - activating said X-ray tube for exposing said object, said cassette and said phototimer until said phototimer switches said X-ray tube off.

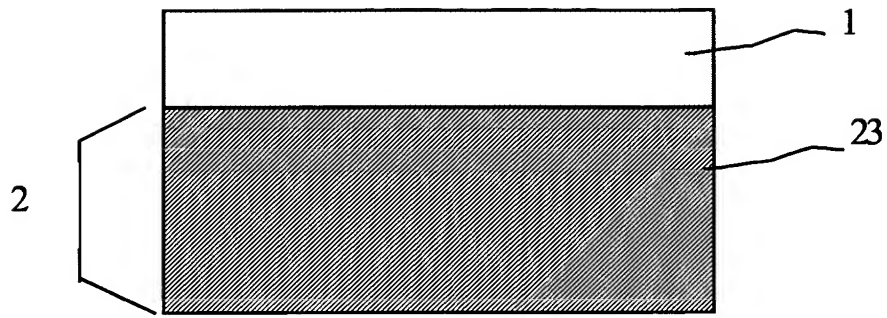


Figure 1

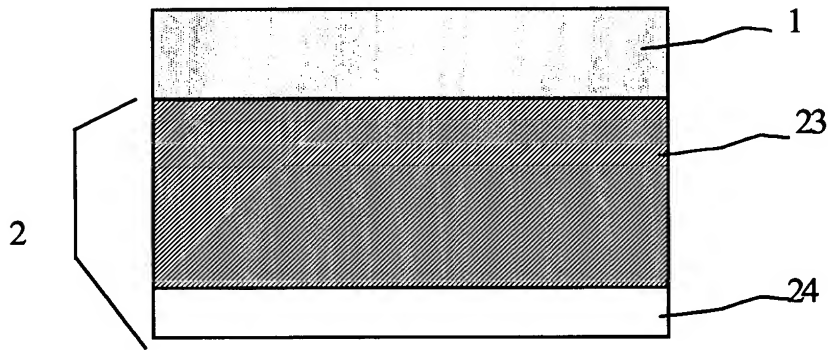


Figure 2

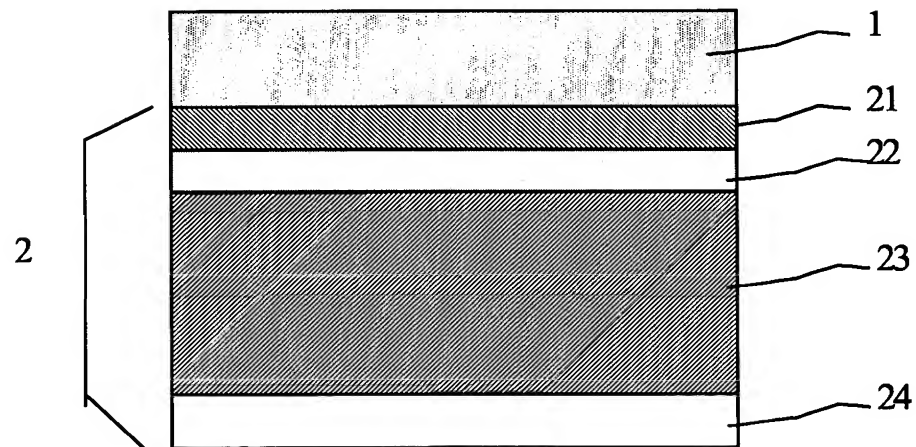


Figure 3

